
Fixing Kits



KEY FEATURES:

- 100% Waterproof & Vapor Proof
- High Compressive Strength (>300 kPa)
- Thermal Insulation & Energy Saving
- Lightweight & Easy to Cut / Install
- Pre-coated Surface Ready for Direct Tiling
- Rot-proof & Mold Resistant

Item	Standard	Value
Product Type	Manufacturer Spec	U-Shape & H-Shape Panel Connection Profiles
Material Grade	EN 755-2 / AISI 304	Extruded Aluminium Alloy (6063-T5) / Stainless Steel
Profile Thickness	EN 12020-2	1.2 mm - 1.5 mm
Inner Channel Width	Manufacturer Spec	10 mm / 12.5 mm / 20 mm / 30 mm (Matches XPS thickness)
Standard Length	EN 755-1	2.44 m / 2.50 m / 3.00 m (Customizable)
Pre-punched Fixing Holes	Manufacturer Spec	Ø 5 mm - 6 mm (Staggered for easy screw mounting)
Tensile Strength (Rm)	EN 755-2	≥ 185 MPa
Yield Strength (Rp0.2)	EN 755-2	≥ 145 MPa
Surface Finish / Coating	ISO 7599 / Qualanod	Anodized Silver / Powder Coated (≥ 10 µm)

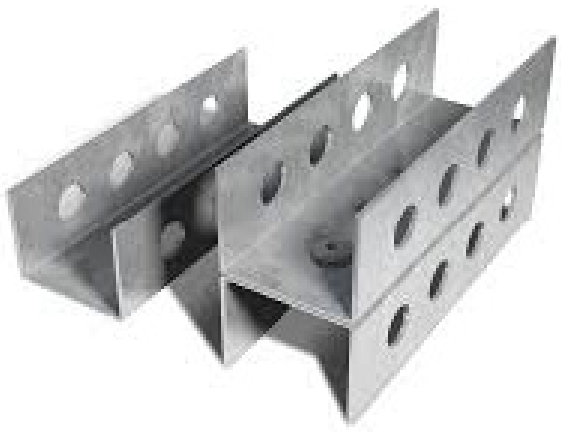

https://www.heatfloorpro.com | info@heatfloorpro.com
WhatsApp | Phone number： +86 136 9125 9651
Making Construction Easier!