

Manifold

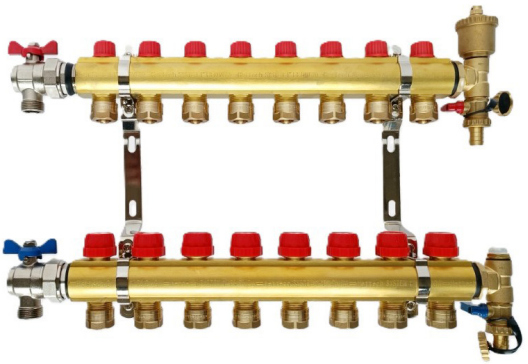

KEY FEATURES:

- Rapid & Uniform Heating
- High Compressive Strength
- Thermal & Acoustic Insulation
- Precision Pre-grooved Design
- Waterproof & Anti-aging Core

Item	Standard	Value
Product Type	Manufacturer Spec	Brass Underfloor Heating Manifold Set
Main Body Material	EN 12165 / CW617N	Forged Brass (High Corrosion Resistance)
Main Bar Size / Thread	ISO 228-1	G 1" Female / Male Thread (DN25)
Outlet Circuit Range	Manufacturer Spec	2 to 12 Ports (Eurocone 3/4" / G 3/4")
Nominal Working Pressure	EN 1264 / ISO 22846	PN 10 (10 bar / 1.0 MPa)
Maximum Test Pressure	EN 1264	16 bar (1.6 MPa, Hydrostatic Strength Test)
Operating Temperature Range	Manufacturer Spec	-10°C to +95°C (Peak 110°C)
Integrated Flow Control	EN 1264-4	0.5 - 5.0 L/min Flow Meters / Balancing Valves
Actuator Compatibility	Manufacturer Spec	M30 × 1.5 mm (Electric Thermal Actuators)
Flammability	EN 13501-1	Class B

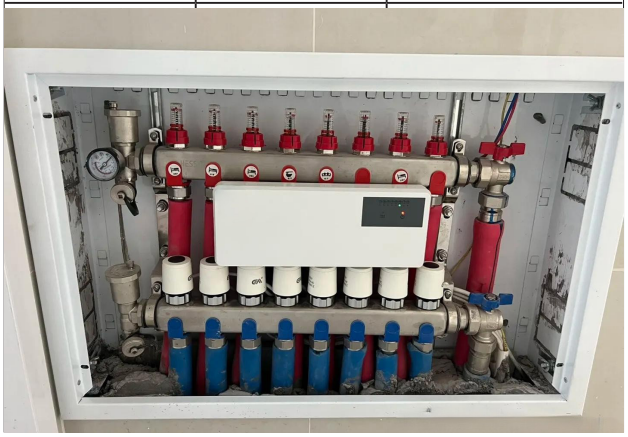

https://www.heatfloorpro.com | info@heatfloorpro.com
WhatsApp | Phone number： +86 136 9125 9651
Making Construction Easier!