
XPS Shower Board



KEY FEATURES:

- 100% Waterproof & Vapor Proof
- High Compressive Strength (>300 kPa)
- Thermal Insulation & Energy Saving
- Lightweight & Easy to Cut / Install
- Pre-coated Surface Ready for Direct Tiling
- Rot-proof & Mold Resistant

Item	Standard	Value
Size	/	Customizable
Thickness	/	40mm
Thermal Conductivity	EN 12667:2001	0.033 - 0.036 Watt/ mK
Compressive Strength	DIN 18534	1.5 % - 2.0 %
Core Material	EN 13164	XPS Foam
Flammability	EN 13501-1	Class A2
Water Absorption	EN 12087	≤ 1.0 % by volume
Waterproof Performance	EN 14891	Waterproof assembly
Resistance to body Impact	ETAG 003	3 x 120N/m
Bending Stiffness	EN 12089	1285 kN/mm²
Shear Bond Strength	EN 1448	3.32kg/cm²

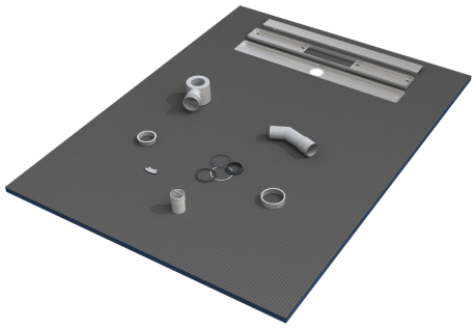

https://www.heatfloorpro.com | info@heatfloorpro.com
WhatsApp | Phone number： +86 136 9125 9651
Making Construction Easier!