
XPS Tile Backer Board



KEY FEATURES:

- 100% Waterproof & Vapor Proof
- High Compressive Strength (>300 kPa)
- Thermal Insulation & Energy Saving
- Lightweight & Easy to Cut / Install
- Pre-coated Surface Ready for Direct Tiling
- Rot-proof & Mold Resistant

Item	Standard	Value
Size	/	4"*8"(Customizable)
Thickness	/	8mm-100mm
Thermal Conductivity	EN 12667:2001	0.033 - 0.036 Watt/ mK
Compressive Strength	EN 826:1996	Minimum of 0.5N/ mm²
Water Vapour Permeability	DIN EN 12086	3.2m
Flammability	EN 13501-1	Class B
Maximum Tile Loading Weight	CERAM121107	90kg/m²
Flexural Strength	ASTM C203	2.05 ±0.02 MPa
Resistance to body Impact	ETAG 003	3 x 120N/m
Bending Stiffness	EN 12089	1285 kN/mm²
Shear Bond Strength	EN 1448	3.32kg/cm²

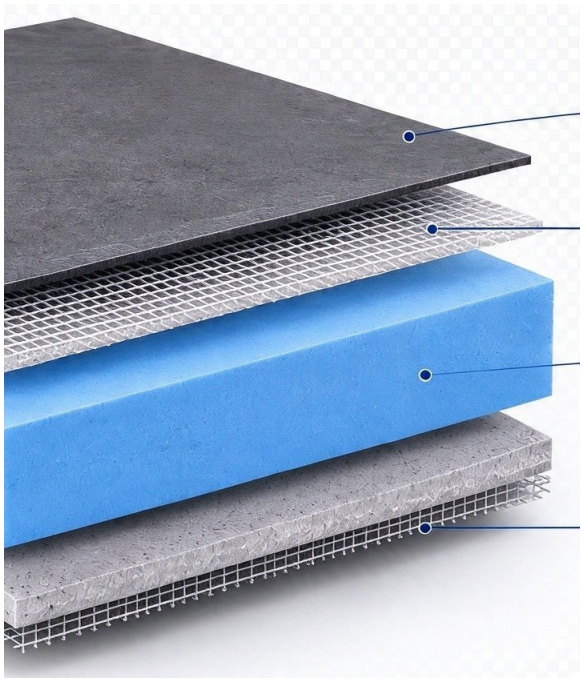

https://www.heatfloorpro.com | info@heatfloorpro.com
WhatsApp | Phone number： +86 136 9125 9651
Making Construction Easier!